PT-E110 DATASHEET

brother

P-touch E110

Menu

0



Entry level labelling machine for electrical contractors and datacom installers

890

B

OK

1 Are 2


QWERTYUIOP

ASDFGHJKL

PT-E110 FEATURES



EU PRODUCTION: APRIL 2017

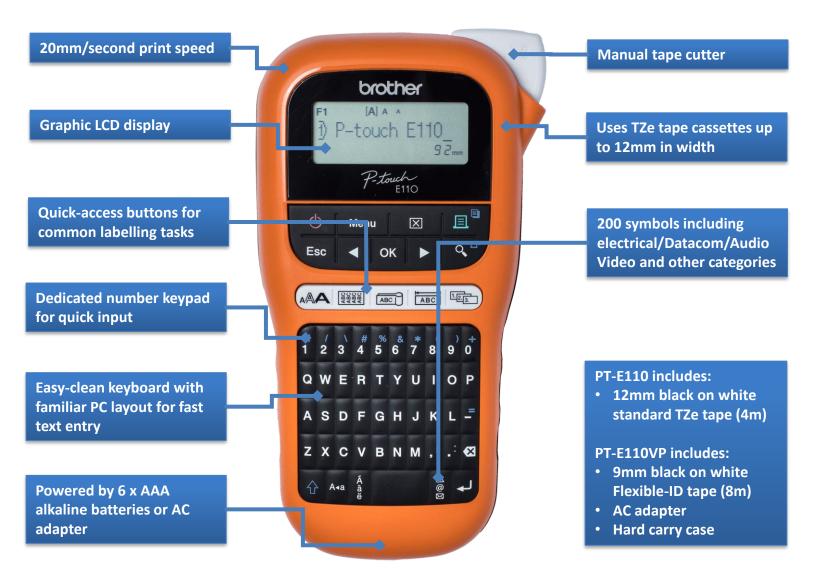

Compliant labelling in the palm of your hand

Ensuring compliance with electrical regulations is critical for electrical installers/contractors. The P-touch E110 produces durable labels ideal for identification of plug and switch faceplates, cables, conduits and consumer units.

Common labelling tasks can be completed easily thanks to the dedicated quick-access buttons and the standard PC keyboard layout. With 200 symbols to choose from several categories including electrical, datacom and audio/video, customise your labels as needed using the easy-to-read graphic LCD.

As many installations use numbers to identify plugs, switches and faceplates, the dedicated numeric keyboard means you can type with one finger. And the serialise function lets you print multiple labels while automatically incrementing the number, such as A001, A002, A003.

Also available as a value pack, that additionally includes an AC adapter and durable carry case.

PT-E110 SPECIFICATIONS



General

Carton contents (PT-E110)	PT-E110 labelling machine
	12mm TZe black on white tape cassette (4m)
	Documentation
	PT-E110 labelling machine
	9mm TZe black on white tape flexible ID tape
Carton contents	cassette (8m)
(PT-E110VP)	AC adapter
	Carry case
	Documentation
Language support	English, German, French, Dutch, Italian, Spanish,
	Portuguese, Danish, Norwegian, Swedish,
	Finnish, Hungarian, Czech, Polish, Romanian,
	Slovenian, Slovakian, Croatian, Brazilian
	Portuguese, Turkish

Dimensions & Weights

Without carton	111 (w) x 58 (d) x 204 (h) 0.4kg
With carton (PT-E110)	190 (w) x 94 (d) x 286 (h)
With carton (PT-E110VP)	314 (w) x 116 (d) x 279 (h)

Built In Features

Keyboard	PC style QWERTY/QWERTZ/AZERTY
Dedicated number keypac	1 Yes
Display type	Graphic Monochrome LCD with label preview capability
Display resolution	16 characters by 1 lines ¦ 128 x 16 dots
Printing speed	Up to 20mm/second
Print resolution	180dpi
Maximum print height	9 mm
Cutter type	Manual cutter
Label length	30mm minimum ¦ 300mm maximum
Maximum lines per label	2
Tape margins	Full, Half, Narrow, Chain Print
Vertical text printing	Yes
Mirror printing	No
Copies	1 to 9
Automatic numbering	Yes (1 – 50)

Label Creation

Helsinki
excl. Normal) ¦ Normal, Bold, Outline, Shadow, ic, Italic Bold, Italic Outline, Italic Shadow
22, 28, 42, 56 point
)
Rectangle with rounded corners

Memory

Label memory locations 9 (up to 720 characters total maximum)

Supplies

Tape types	TZe	
Tape widths	TZe: 3.5, 6, 9, 12,	
Optional Access	ories	
Tape Cutter	TC-4	
AC adaptor	AD-24ES	